



PH24 ECTRL

 **3 in 1**
TRIPLE CONNECTIVITY



SMART AND CONNECTED COLUMN CONTROLLER FOR DRY ELECTRIC RADIATOR TRIPLE COMMUNICATION PROTOCOL WIFI, ZIGBEE 3.0, BLUETOOTH

Can be remotely-controlled thanks to a customizable mobile app, large full black and white backlit screen, auto-programmable with self-learning process and dual optimization feature, occupancy detection, opened window detection, gauge and power consumption indication in kWh

Overview

Main features

- Ambient temperature control
- Temperature setpoint adjustment
- **Power On / Standby**
- **Operating modes selection**
- **Quick heating of the room using the instant Boost**
- **Automatic and self-learning programming, customized or can be programmed remotely using the pilot wire**

Applicatif

- Dry electric radiator

Benefits


- **Modern and innovative design:** polycarbonate column with exclusive style, extra flat occupancy detector.
- **Directly connectable to the Internet** through the Internet service provider's box, without any other accessory.
- **Interoperability guaranteed** thanks to the ZIGBEE 3.0 protocol integrated into the product.
- **Can be remotely controlled** by your smartphone, tablet or PC thanks to a dedicated and customizable mobile application.
- **Excellent ergonomics of setting: 2.09 inch backlit black and white interface easy to read**, intuitive navigation and easy to use.
- **Latest generation advanced electronics** with an OTA microprocessor for software remote update.
- **"Smart" electronic control:** This means stable and accurate temperature in the room all year round.
- **Energy saving package**, comfort, performance, energy savings.
- **Auto-programming:** automatic programming by self-learning of the lifestyle.
- **Automatic changeover** summer/winter time.
- **Permanent saving of settings.**

Functional specifications


Use



Comfort setpoint temperature	Preset to +19°C , adjustable from +7°C to +30°C by interval of 0,5°C
Comfort + setpoint temperature	Preset to +21°C , adjustable from Comfort +1°C to +30°C by interval of 0,5°C
Eco setpoint temperature	Preset to +15,5°C , adjustable from +5°C to +19°C by interval of 0,5°C
Frost protection setpoint temperature	Preset to +7°C , adjustable from +5°C to +12°C by interval of 0,5°C
Operating modes	Auto (programming), Comfort, Comfort +, Eco, Boost, Frost protection, Holidays
Boost (only available through app)	Adjustable between 5 and 90 minutes in 5 minutes intervals: to rise quickly the temperature and turn on the heating for a time period requested

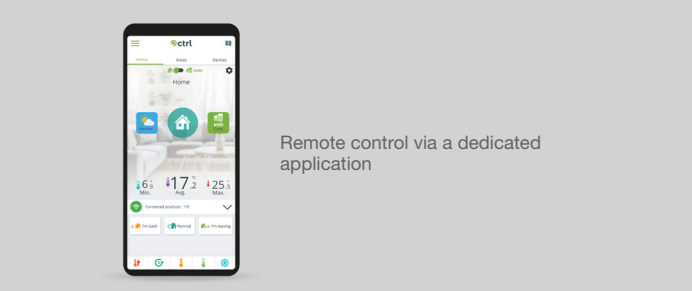

Remote control via a dedicated application

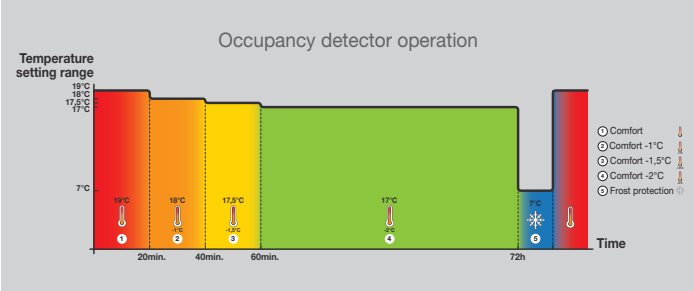

Holiday mode programmable	Frost protection during a programmed period of absence
Energy consumption gauge	Automatic indication of the level of energy consumption depending on the setpoint temperature
Power consumption indication in kWh	Posting of the estimated amount of energy consumed in kWh since the last reset to 0 of the energy meter
Open window detection	Automatic switching to Frost protection mode when a significant drop in temperature is detected when ventilating a room
Aeration function	Manual aeration cycle can be activated at any time
Occupancy detection	During an unoccupied period, the setpoint temperature is automatically and progressively decreased
Auto-programming	As soon as the device is switched on and without any initial adjustment, the device is in learning mode to understand and memorize the user's lifestyle. The integrated smart algorithm is going to analyze this information in real time in order to optimize and adapt the programme for the coming weeks
Programming	<ul style="list-style-type: none">- 8 different preset program profiles for each day of the week: Auto-programming, 1 comfort period, 2 comfort period, 3 comfort period, non-stop Comfort mode, non-stop Eco (economy) mode, non-stop Frost protection mode and Comfort + mode (only through app)- Programming assistant to help the user step by step (only through app)- Each day of the week can be customised (day by day or by group of days)- Manual and temporary overriding of a programme
Dual optimization feature	Depending on different parameters of the room, the controller calculates and optimizes the programming of Comfort and economy periods (Eco) according to the choice of the user; Eco oriented , priority to savings or Comfort oriented , priority to comfort (by default)
Help for the visually impaired	<ul style="list-style-type: none">- The button power on/standby mode is in relief to be easily identifiable to the touch- Audible beeps indicating the change from the standby mode to active mode
Safety	<ul style="list-style-type: none">- Child anti-tamper: touch screen locking- Settings safety :<ul style="list-style-type: none">- Min. and Max limits of the adjustment range of the Comfort setting temperature- Customizable PIN code locking (prevents access to the Comfort mode, advanced and expert settings)- Time, date and setting backup in case the mains power supply goes off- Internal protection against any overheating
3 levels of settings	User, Advanced, Expert

Installation

Column holder supplied , to be mounted directly on the radiator
Easy to install: Waiting position when mounting column to facilitate the connexion to the electric cartridge
Connexion to the heating cartridge by faston

User settings

Language use	Preset to French , English available
Wifi connexion	Direct internet connexion through the Internet provider box thanks to a dedicated mobile app
Backlighting	3 possible settings: <ul style="list-style-type: none">- Reduced display with low brightness and backlighting when a button is pressed or during occupancy detection- Reduced display with low brightness and backlighting when a button is pressed- Reduced display with black screen and backlighting when a button is pressed
Return to the factory settings (user)	

Advanced settings

Occupancy detection	Enabled by default , can be disabled
Automatic open window detection	Enabled by default , can be disabled
Min. setpoint temperature	Preset at +7°C , adjustable from +7°C to +18°C by interval of 1°C
Max. setpoint temperature	Preset at +30°C , adjustable from +19°C to +30°C by interval of 1°C
Boost duration (only through app)	60 minutes by default , adjustable from 5 to 90 minutes by 5 minutes steps
Window airing cycle duration	30 minutes by default , adjustable from 5 to 90 minutes by 5 minutes steps
Dual optimization feature	Comfort by default, Eco and Off available
Connection deactivation (airplane mode)	Possibility to deactivate the product connection
PIN code locking	Initialization - Customization - Activation and deactivation
Return to the factory settings (user and advanced)	



Optional decorative left cover:

- Narrow left-hand decorative surround for a neat, discreet finish
- Compatible with straight radiators, 96mm depth
- Easy to install on the radiator using the fixing clips supplied

Expert settings

Reduced display brightness	50% by default, from 10% to 100% by intervals of 10 %
Temperature adjustment	Ambient temperature sensor adjustment with automatic adjustment
Power setting (Used for estimation of consumption in KWh)	Adjustable from 300W to 2000W by intervals of 50W
Deleting connection information	Possibility to delete all connection information, the product will no longer be connected
Return to the user factory settings (user, advanced and expert)	

Technical specifications

Dimensional and finish specifications

Height	564 mm
Width	86 mm
Depth	96 mm
Colors	White
Net weight	1,06 Kg

Power supply

Operating voltage	230V AC+/-10% 50Hz
Maximum power	2000W resistive load
Power cord	1000mm: 3 conductors

Control

Control type Electronic	PID (Proportional Integral Derivative) control, triggered by a triac
-------------------------	--

Environment

Protection rating	IP24 after installation under the responsibility of the integrator
Class	Class II, after installation under the responsibility of the integrator
Operating temperature	0°C à +60°C
Temperature setting range	+7°C à +30°C
Storage temperature	-20°C à +70°C
NTC electronic temperature sensor	

Product code

Code	Description
COAPH24IEA	Connected column Bluetooth + Wi-Fi + Zigbee 3.0 self-programming with occupancy detection for dry electric radiator, CLII, 96mm
COAPH24IELCA	Connected column Bluetooth + Wi-Fi, self-programming with occupancy detection for dry electric radiator, CLII, 96mm
COALCKA	Decorative left-hand column with fixing clips, for electric radiator, 96mm deep

Product customization (style, features) possible on request. Please contact us.

Pictures and technical specifications are not contractual and given as an indication. Specifications may change depending on product development. Imhotep creation keep the right to change without notice.